


# MINIBLOC 100kV/70mA

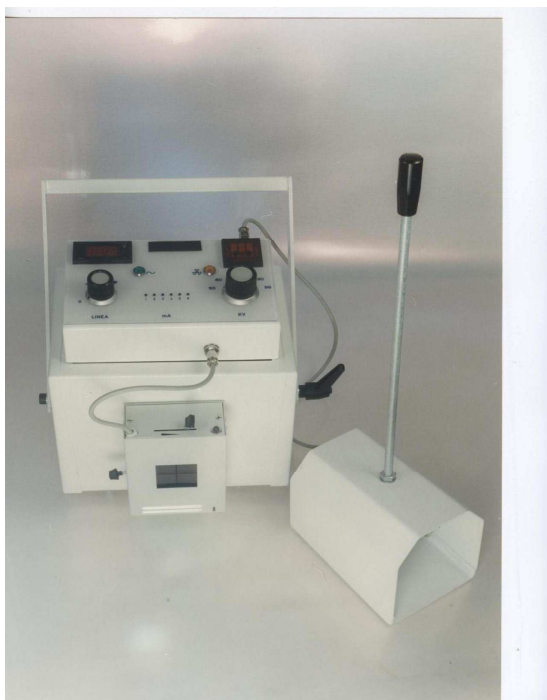

## 1 CONTROL PANEL

POWER SUPPLY:	230V 50Hz
COUNTER POWER:	3KW
kV ADJUSTMENT:	from 50 kV up to 100 kV step 10 kV
mA ADJUSTMENT :	from 40 mA to 70 mA
sec. ADJUSTMENT:	from 0.01 to 1.99 sec

## 2 X-RAY TUBE-HEAD

VOLTAGE:	99kV
CURRENT:	70mA
LEAKAGE RADIATION:	less than 1mG/hour according to IEC601-1-3

## 3 X-RAY TUBE

FOCUS:	2.6mm
MAX VALUE OF kV:	105 Kv
ANOD MATERIAL:	Tungsten
ANOD ANGLE:	19°

## 4 SAFETY DEVICES

Visual indicator

## 5 OPTIONAL

Light collimator  
Foot - switch with 6m cable

